



QK PREMIUM
FLIGHT CONVEYOR MACHINES
WITH 3R+ REINFORCED TRIPLE RINSE

KROMO
YOUR SMART WASH



Nowadays, kitchens, canteens and professionals of the sector are always looking for reliable and solid equipment with the best technology. In order to equip increasingly demanding customers, Kromo offers its cutting-edge QK PREMIUM range. The basis of its development is a constant search for the best components and advanced technology to provide a concrete solution to intense everyday work. Obviously, the goal of a professional dishwasher is to satisfy customers with deep-dish cleaning. Kromo knows that a clean plate, glass and cutlery are essential elements for the image conveyed to guests. Three consecutive rinsing phases at the perfect hygienic temperature meet all the most stringent washing

requirements. The development of the QK PREMIUM range has mainly focused on improving performance and consumption and placing it among the most coveted machines on the market. Let's not forget that Kromo's vision is to keep the use of environmental resources as low as possible. This is evidenced by our certification of the use of the renewable energies newly obtained and certain unique functions such as HDRF which make the machine energy self-sufficient and incredibly economically advantageous. The experience of communication with the machine is renewed thanks to the new CONNECTIVITY remote interaction system.

Everything is under control in a twinkling!



FEATURES

STANDARD

- SMART DRIVE+ 10 speed advancement system
- 710 mm wide conveyor
- Plates belt
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operations
- IPX5 electronic board
- Alarms and events report
- Autotimer
- Break Tank system
- Centralized 1-DRAIN and automatic AD drain, with total or partial emptying of the tanks
- Wash arms ALL-IN-1
- Use economizer
- ECO-DET Detergent economizer
- Thermal and acoustic insulation of both the machine and tanks
- ACID PROOF Radial wash tanks in S/S AISI 316 inclined to provide complete drainage of the wash water
- S/S surface filters CLEAN+ to protect the wash tanks as well as the wash pump
- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- THERMO BARRIER system for comfort in use
- Predisposition for Kromo rinse-aid and detergent dispensers connection
- ACID PROOF stainless steel boilers in AISI 316, fully insulated to reduce thermal loss.
- Vertical self-cleaning pumps
- Booster pump
- Reinforced triple rinse 3R+: improved consumptions (reverse osmosis on request)
- CPF System: Controlled Pressure Flow
- Water, energy consumptions and working time control system
- Possible working modes for dryer unit: all off, only fan, half power 4,5 kW + fan, total power 9 kW + fan



FEATURES

OPTIONS


- 5 different conveyor belts available, also with cutlery lane
- Double skin shelf or dryer module
- 2 models of steam condenser available
- 3 models of heat recovery to be chosen
- KHDRF: patented insulated linear system of dryer and heat recovery
- System available steam-heated. Self-cleaning of the heat exchanger included.
- AS6 automatic shower with EASY+ with filter system
- Dispensers kit with peristaltic pump, for detergent as well as rinse-aid
- CONNECTIVITY remote control compliant with the HACCP norms
- Delivery in 2 or more parts, to ease installation operations
- Automatic self-cleaning of the machine available, with dedicated booster pump on request
- Dedicated space for detergent and rinse-aid jugs
- S/S pumps
- Extra power in the boiler

STANDARD BELT



Standard belt
for plates and
optional cutlery lane

OPTIONAL BELT

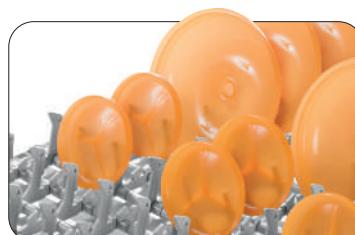

Special belt
for hospitals



Standard belt
for glasses



Special belt
for thermal trays



Standard belt
for trays and utensils



Special belt
for in-flight catering


CONNECTIVITY 4.0

WHEREVER YOU ARE...

THE SITUATION JUST A CLICK AWAY

You will be constantly connected to the machine to monitor the work phases, any alarms and remotely configure the parameters according to your needs.

Compliant with HACCP regulations.

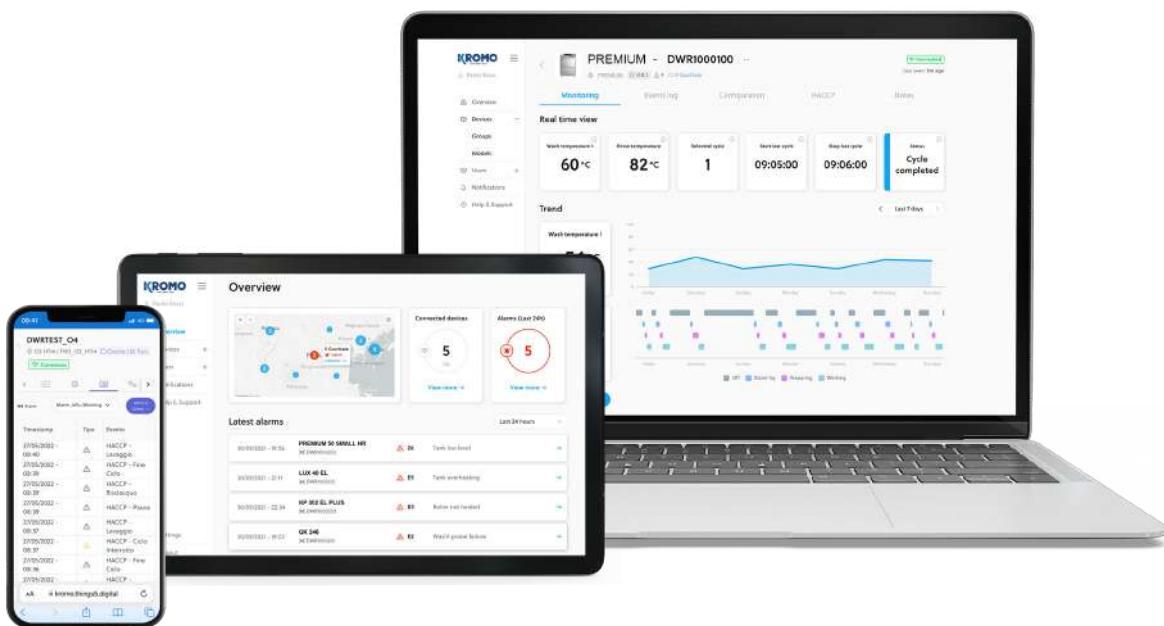

View all the working parameters and historical events, working hours and any problems at any time.



In case of problems, the machine promptly sends an email to you and to the technician who can intervene remotely to solve the problem or equip himself for on-site intervention.



The program allows you to remove an Excel file with all Haccp data at any time.






Discounts are provided for the purchase of 4.0 devices. You will be able to recover 40% of the cost of the car. Request more information to find out more.

QK PREMIUM

FLIGHT CONVEYOR MACHINES
WITH 3R+ REINFORCED TRIPLE RINSE

Model	Voltage	Capacity	Poids	Code
QK 2500 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 27,75 kW	450 H 5500x1110 2070/2200H 715 kg		QK 2500
	400 V 3N ~ 50 Hz 3,25 kW 17 kg/h	1950/3690 dishes/h 2850* dishes/h	AS6 +600 mm	QK 2500 AS6 QK 2500 V
				QK 2500 V AS6
QK 3800 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 30,2 kW	450 H 6100x1110 2070/2200H 850 kg		QK 3800
	400 V 3N ~ 50 Hz 4,2 kW 20 kg/h	2400/4050 dishes/h 3660* dishes/h	AS6 +600 mm	QK 3800 AS6 QK 3800 V
				QK 3800 V AS6
QK 4200 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 34,25 kW	450 H 6400x1110 2070/2200H 865 kg		QK 4200
	400 V 3N ~ 50 Hz 5,25 kW 25 kg/h	3000/4800 dishes/h 4200* dishes/h	AS6 +600 mm	QK 4200 AS6 QK 4200 V
				QK 4200 V AS6
QK 5400 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 50,2 kW	450 H 7000x1110 2070/2200H 1000 kg		QK 5400
	400 V 3N ~ 50 Hz 6,2 kW 29 kg/h	4200/6450 dishes/h 5100* dishes/h	AS6 +600 mm	QK 5400 AS6 QK 5400 V
				QK 5400 V AS6

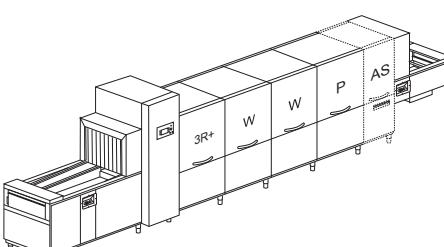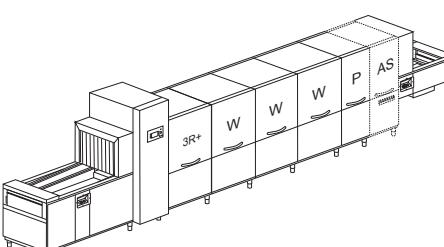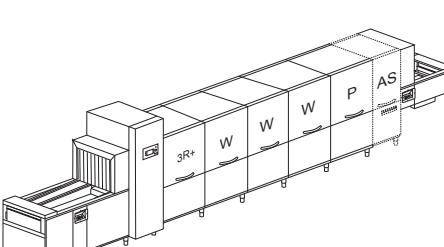Model	Voltage	Capacity	Poids	Code
QK 6000 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 51,25 kW	450 H 7300x1110x2070/2200H 1015 kg		QK 6000
	400 V 3N ~ 50 Hz 7,25 kW 29 kg/h	4350/6750 dishes/h 5550* dishes/h	AS6 +600 mm	QK 6000 AS6
				QK 6000 V
				QK 6000 V AS6
QK 6800 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 70,2 kW	450 H 8300x1110x2070/2200H 1150 kg		QK 6800
	400 V 3N ~ 50 Hz 8,2 39 kg/h	5250/8100 dishes/h 6450* dishes/h	AS6 +600 mm	QK 6800 AS6
				QK 6800 V
				QK 6800 V AS6
QK 7800 <i>IMPROVED</i>				
	400 V 3N ~ 50 Hz 74,25 kW	450 H 8600x1110x2070/2200H 1165 kg		QK 7800
	400 V 3N ~ 50 Hz 9,25 kW 44 kg/h	5850/9000 dishes/h 6900* dishes/h	AS6 +600 mm	QK 7800 AS6
				QK 7800 V
				QK 7800 V AS6

P Prewash**W** Wash**3R** Double pre-rinse + rinse on module**K10** Corner prewash**AS6** Automatic shower with filter drawer +600 mm**V** Steam-heated

* Productivity according to DIN SPEC 10534 (contact time)

EAC label upon request

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

			AUTOTIMER	PRE DOS	DDE-GROUP	DOS/S	SAN	
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Autotimer	Kromo disp. connections	Dispensers kit	Dispenser with probe	Sanitization
QK 2500	+ 2%	●	+ 3%	●	●	€	€	€
QK 2500 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 2500 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 2500 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 3800	+ 2%	●	+ 3%	●	●	€	€	€
QK 3800 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 3800 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 3800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 4200	+ 2%	●	+ 3%	●	●	€	€	€
QK 4200 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 4200 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 4200 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 5400	+ 2%	●	+ 3%	●	●	€	€	€
QK 5400 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 5400 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 5400 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 6000	+ 2%	●	+ 3%	●	●	€	€	€
QK 6000 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 6000 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 6000 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 6800	+ 2%	●	+ 3%	●	●	€	€	€
QK 6800 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 6800 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 6800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QK 7800	+ 2%	●	+ 3%	●	●	€	€	€
QK 7800 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QK 7800 V	+ 1%	●	+ 3%	●	●	€	€	€
QK 7800 V AS6	+ 1%	●	+ 3%	●	●	€	€	€

● Standard

□ Upon request

DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included

DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be double skin upon request

Peak-cut connect upon request

Warm water supply 55 °C

We recommend to install the machine in a well-ventilated room, with a properly sized steam exhausting system.

	PAP-SAN	DWI	DWI / T	CONNECTIVITY	XP	PAP	DRIVE
Model	Booster pump sanitization	Thermoacoustic insulation	Tanks insulation	CONNECTIVITY (HACCP)	Extra power	Booster pump	Smart drive
QK 2500	€	●	●	€	€	●	●
QK 2500 AS6	€	●	●	€	€	●	●
QK 2500 V	€	●	●	€	□	●	●
QK 2500 V AS6	€	●	●	€	□	●	●
QK 3800	€	●	●	€	€	●	●
QK 3800 AS6	●	●	●	€	€	●	●
QK 3800 V	€	●	●	€	□	●	●
QK 3800 V AS6	●	●	●	€	□	●	●
QK 4200	€	●	●	€	€	●	●
QK 4200 AS6	●	●	●	€	€	●	●
QK 4200 V	€	●	●	€	□	●	●
QK 4200 V AS6	●	●	●	€	□	●	●
QK 5400	●	●	●	€	€	●	●
QK 5400 AS6	●	●	●	€	€	●	●
QK 5400 V	●	●	●	€	€	●	●
QK 5400 V AS6	●	●	●	€	€	●	●
QK 6000	●	●	●	€	€	●	●
QK 6000 AS6	●	●	●	€	€	●	●
QK 6000 V	●	●	●	€	€	●	●
QK 6000 V AS6	●	●	●	€	€	●	●
QK 6800	●	●	●	€	€	●	●
QK 6800 AS6	●	●	●	€	€	●	●
QK 6800 V	●	●	●	€	€	●	●
QK 6800 V AS6	●	●	●	€	€	●	●
QK 7800	●	●	●	€	€	●	●
QK 7800 AS6	●	●	●	€	€	●	●
QK 7800 V	●	●	●	€	□	●	●
QK 7800 V AS6	●	●	●	€	□	●	●

CONNECTIVITY Includes HACCP option. 10-year plan

XP In case of cold water supply for rinse (8-55 °C) and without any heat recovery, the extra power option is mandatory.
In case of cold water supply for rinse (8-15 °C), we recommend the heat recovery option.

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

Model	10 speeds	Master switch	Surface filters	Peak-cut for Kromo dosing	Estimated consumption readout	PI	1-DRAIN
QK 2500	●	●	●	●	●	€	●
QK 2500 AS6	●	●	●	●	●	€	●
QK 2500 V	●	●	●	●	●	€	●
QK 2500 V AS6	●	●	●	●	●	€	●
QK 3800	●	●	●	●	●	€	●
QK 3800 AS6	●	●	●	●	●	€	●
QK 3800 V	●	●	●	●	●	€	●
QK 3800 V AS6	●	●	●	●	●	€	●
QK 4200	●	●	●	●	●	€	●
QK 4200 AS6	●	●	●	●	●	€	●
QK 4200 V	●	●	●	●	●	€	●
QK 4200 V AS6	●	●	●	●	●	€	●
QK 5400	●	●	●	●	●	€	●
QK 5400 AS6	●	●	●	●	●	€	●
QK 5400 V	●	●	●	●	●	€	●
QK 5400 V AS6	●	●	●	●	●	€	●
QK 6000	●	●	●	●	●	€	●
QK 6000 AS6	●	●	●	●	●	€	●
QK 6000 V	●	●	●	●	●	€	●
QK 6000 V AS6	●	●	●	●	●	€	●
QK 6800	●	●	●	●	●	€	●
QK 6800 AS6	●	●	●	●	●	€	●
QK 6800 V	●	●	●	●	●	€	●
QK 6800 V AS6	●	●	●	●	●	€	●
QK 7800	●	●	●	●	●	€	●
QK 7800 AS6	●	●	●	●	●	€	●
QK 7800 V	●	●	●	●	●	€	●
QK 7800 V AS6	●	●	●	●	●	€	●

● Standard

--- Not available

LANE Only with KDRF69 and KDRF6V

DIV Compulsory for machines > 4,5 m length

BT Booster pump included

DVGW Not available with heat recovery and steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

	AD	ECO-DET	X-BELT	LANE	DIV	BT	DVGW
Model	Automatic drain	Chemicals saving system	Special belt	Cutlery lane	Price per division	Break tank	DVGW
QK 2500	●	●	+ 7 %	----	€	●	€
QK 2500 AS6	●	●	+ 7 %	----	€	●	€
QK 2500 V	●	●	+ 7 %	----	€	●	€
QK 2500 V AS6	●	●	+ 7 %	----	€	●	€
QK 3800	●	●	+ 7 %	----	€	●	€
QK 3800 AS6	●	●	+ 7 %	----	€	●	€
QK 3800 V	●	●	+ 7 %	----	€	●	€
QK 3800 V AS6	●	●	+ 7 %	----	€	●	€
QK 4200	●	●	+ 7 %	+ 5 %	€	●	€
QK 4200 AS6	●	●	+ 7 %	----	€	●	€
QK 4200 V	●	●	+ 7 %	+ 5 %	€	●	€
QK 4200 V AS6	●	●	+ 7 %	----	€	●	€
QK 5400	●	●	+ 7 %	----	€	●	€
QK 5400 AS6	●	●	+ 7 %	----	€	●	€
QK 5400 V	●	●	+ 7 %	----	€	●	€
QK 5400 V AS6	●	●	+ 7 %	----	€	●	€
QK 6000	●	●	+ 7 %	+ 5 %	€	●	€
QK 6000 AS6	●	●	+ 7 %	----	€	●	€
QK 6000 V	●	●	+ 7 %	+ 5 %	€	●	€
QK 6000 V AS6	●	●	+ 7 %	----	€	●	€
QK 6800	●	●	+ 7 %	----	€	●	€
QK 6800 AS6	●	●	+ 7 %	----	€	●	€
QK 6800 V	●	●	+ 7 %	----	€	●	€
QK 6800 V AS6	●	●	+ 7 %	----	€	●	€
QK 7800	●	●	+ 7 %	+ 5 %	€	●	€
QK 7800 AS6	●	●	+ 7 %	----	€	●	€
QK 7800 V	●	●	+ 7 %	+ 5 %	€	●	€
QK 7800 V AS6	●	●	+ 7 %	----	€	●	€

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

Modello	NZ3	NZ6	NZH6	KDRF68	KDRF69	KDRF6V	KDRF99M	KDRF9VM	KDRF99MB	KDRF9VMB
	Neutral zone 300	Neutral zone 600	Neutral zone for dryer 600	Shelf dryer	Shelf dryer	Steam-heated shelf dryer	Module dryer	Steam-heated dryer module	Dryer module with blowers	Steam-heated dryer module with blowers
QK 2500 - QK 2500 AS6	€	€	€	€	€	---	€	---	€	---
QK 2500 V - QK 2500 V AS6	€	€	€	€	€	€	€	€	€	€
QK 3800 - QK 3800 AS6	€	€	€	€	€	---	€	---	€	---
QK 3800 V - QK 3800 V AS6	€	€	€	€	€	€	€	€	€	€
QK 4200 - QK 4200 AS6	€	€	€	€	€	---	€	---	€	---
QK 4200 V - QK 4200 V AS6	€	€	€	€	€	€	€	€	€	€
QK 5400 - QK 5400 AS6	€	€	€	€	€	---	€	---	€	---
QK 5400 V - QK 5400 V AS6	€	€	€	€	€	€	€	€	€	€
QK 6000 - QK 6000 AS6	€	€	€	€	€	---	€	---	€	---
QK 6000 V - QK 6000 V AS6	€	€	€	€	€	€	€	€	€	€
QK 6800 - QK 6800 AS6	€	€	€	€	€	---	€	---	€	---
QK 6800 V - QK 6800 V AS6	€	€	€	€	€	€	€	€	€	€
QK 7800 - QK 7800 AS6	€	€	€	€	€	---	€	---	€	---
QK 7800 V - QK 7800 V AS6	€	€	€	€	€	€	€	€	€	€


--- Not available

NZ3 Recommended with big quantities of trays to wash

NZ6 Recommended with big quantities of trays to wash. Module equipped with a front door

NZH6 Recommended with dryers with blowers

KDRF99M - KDRF9VM - KDRF99MB Module with front door

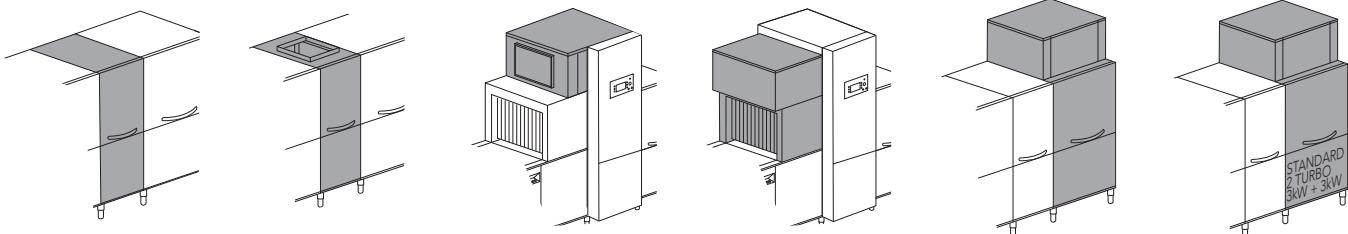

NZ3 + 300 mm Neutral zone	NZH6 + 600 mm Neutral zone with door for dryer	KDRF68 9 kW Shelf dryer	KDRF69 9 kW Shelf dryer	KDRF99M + 900 mm Dryer module	KDRF99MB + 900 mm Dryer module
NZ6 + 600 mm Neutral zone with door			KDRF6V Steam heated shelf dryer	KDRF9VM + 900 mm Steam heated dryer module	KDRF9VMB + 900 mm Steam heated dryer module

	KSCF10	KSCF15	KHRF15	KHRF20	KHRPF40	3R+	STOCK	KHDFR	KHDFV
Modello	Steam condenser	Steam condenser	Heat recovery	Heat recovery	Heat recovery	Triple rinse	Chemicals compartment	Heat recovery	Heat recovery
QK 2500 - QK 2500 AS6	€	€	€	€	€	●	€	€	---
QK 2500 V - QK 2500 V AS6	€	€	€	€	€	●	€	---	€
QK 3800 - QK 3800 AS6	€	€	€	€	€	●	€	€	---
QK 3800 V - QK 3800 V AS6	€	€	€	€	€	●	€	---	€
QK 4200 - QK 4200 AS6	€	€	€	€	€	●	€	€	---
QK 4200 V - QK 4200 V AS6	€	€	€	€	€	●	€	---	€
QK 5400 - QK 5400 AS6	€	€	€	€	€	●	€	€	---
QK 5400 V - QK 5400 V AS6	€	€	€	€	€	●	€	---	€
QK 6000 - QK 6000 AS6	€	€	€	€	€	●	€	€	---
QK 6000 V - QK 6000 V AS6	€	€	€	€	€	●	€	---	€
QK 6800 - QK 6800 AS6	€	€	€	€	€	●	€	€	---
QK 6800 V - QK 6800 V AS6	€	€	€	€	€	●	€	---	€
QK 7800 - QK 7800 AS6	€	€	€	€	€	●	€	€	---
QK 7800 V - QK 7800 V AS6	€	€	€	€	€	●	€	---	€

KSCF15 Not available with dryer

3R+ Reinforced triple rinse: Improved consumptions (Reverse osmosis on request).


With osmotic water supply osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

KHRF15 - KHRF20 - KHRPF40 - KHDFR - KHDFV

In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional

All dryers are double skin

Option compatibility to be confirmed by the manufacturer after verification

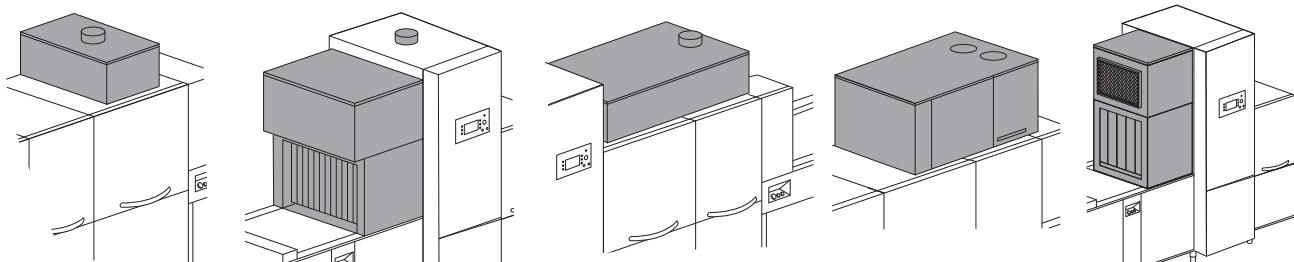

KSCF10
Steam condenser

KHRF15
Reinforced compact heat recovery

KHRF20
Heat recovery

KHRPF40
Heat recovery with heat pump

KHDFR
Electric dryer 9 kW + heat recovery

KSCF15
Reinforced steam condenser


KHDFV
Steam heated dryer + heat recovery

OPTIONS


	MI900	MI1200	MIS1200	MI1800	MI2200	MIR2200
Model	Entry mod. 900	Entry mod. 1200	Over. entry mod. 1200	Entry mod. 1800	Entry mod. 2200	Lowered belt entry mod. 2200
QK 2500 - QK 2500 AS6	€	€	●	€	€	€
QK 2500 V - QK 2500 V AS6	€	€	●	€	€	€
QK 3800 - QK 3800 AS6	€	€	●	€	€	€
QK 3800 V - QK 3800 V AS6	€	€	●	€	€	€
QK 4200 - QK 4200 AS6	€	€	●	€	€	€
QK 4200 V - QK 4200 V AS6	€	€	●	€	€	€
QK 5400 - QK 5400 AS6	€	€	●	€	€	€
QK 5400 V - QK 5400 V AS6	€	€	●	€	€	€
QK 6000 - QK 6000 AS6	€	€	●	€	€	€
QK 6000 V - QK 6000 V AS6	€	€	●	€	€	€
QK 6800 - QK 6800 AS6	€	€	●	€	€	€
QK 6800 V - QK 6800 V AS6	€	€	●	€	€	€
QK 7800 - QK 7800 AS6	€	€	●	€	€	€
QK 7800 V - QK 7800 V AS6	€	€	●	€	€	€

- Standard
- Upon request
- Not available


Option compatibility to be confirmed by the manufacturer after verification




Overhanging entry module



Entry module






Lowered belt entry module



Exit module

	MI2700	MIR2700	EM900	EM1200	EM1800	EM2200	EM2700
Model	Entry mod. 2700	Lowered belt entry mod. 2700	Exit mod. 900	Exit mod. 1200	Exit mod. 1800	Exit mod. 2200	Exit mod. 2700
QK 2500 - QK 2500 AS6	€	€	□	□	●	€	€
QK 2500 V - QK 2500 V AS6	€	€	□	□	●	€	€
QK 3800 - QK 3800 AS6	€	€	□	□	●	€	€
QK 3800 V - QK 3800 V AS6	€	€	□	□	●	€	€
QK 4200 - QK 4200 AS6	€	€	□	□	●	€	€
QK 4200 V - QK 4200 V AS6	€	€	□	□	●	€	€
QK 5400 - QK 5400 AS6	€	€	□	□	●	€	€
QK 5400 V - QK 5400 V AS6	€	€	□	□	●	€	€
QK 6000 - QK 6000 AS6	€	€	□	□	●	€	€
QK 6000 V - QK 6000 V AS6	€	€	□	□	●	€	€
QK 6800 - QK 6800 AS6	€	€	□	□	□	●	€
QK 6800 V - QK 6800 V AS6	€	€	□	□	□	●	€
QK 7800 - QK 7800 AS6	€	€	□	□	□	●	€
QK 7800 V - QK 7800 V AS6	€	€	□	□	□	●	€

	Description	Capacity	Dimensions	Code	
	GLASS BASKET WITH GLASS SUPPORT AND ANTI-TIPPING LID		500x500x235 H	C 135	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	CUTLERY BASKET		490x180x140 H	C 47	



KROMO ALI GROUP SRL

Via Mestre, 3
31033 Castelfranco Veneto (TV)
T: +39 0423 734580
F: +39 0423 734581
kromo@kromo-ali.com

SERVICE:

T. +39 0423 734593
F: +39 0423 734592
[E: service@kromo-ali.com](mailto:service@kromo-ali.com)

www.kromo-ali.com

Edition 05.2023

an Ali Group Company



The Spirit of Excellence